


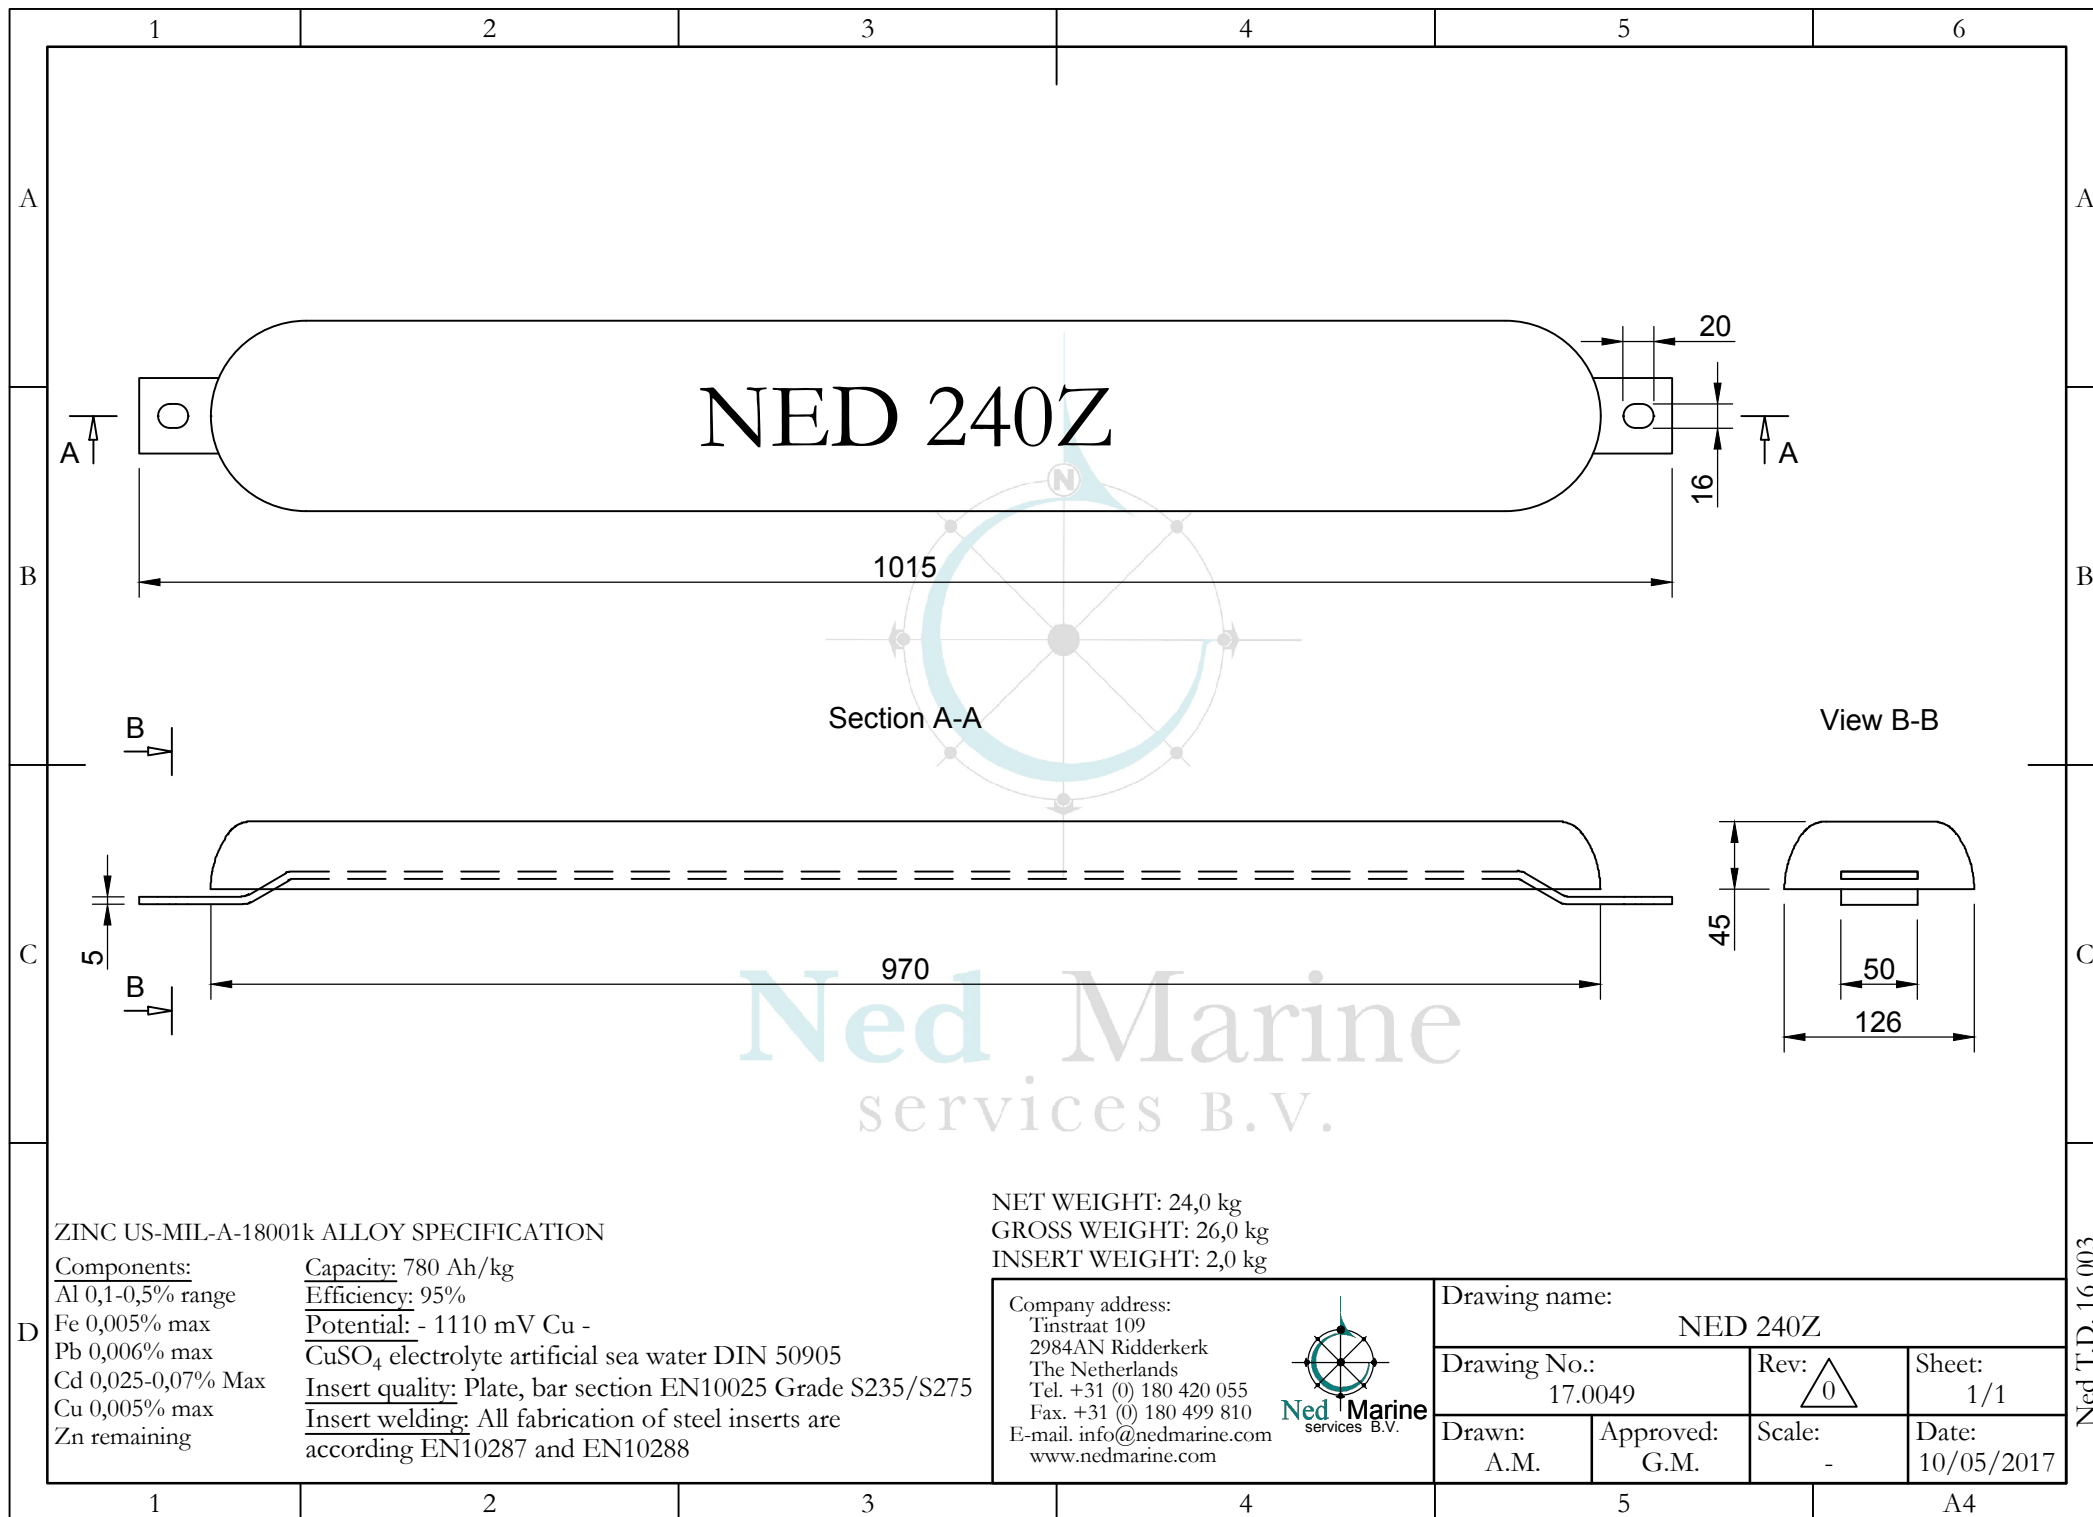

ZINC US-MIL-A-18001k ALLOY SPECIFICATION

Components:

Al 0,1-0,5% range
 Fe 0,005% max
 Pb 0,006% max
 Cd 0,025-0,07% Max
 Cu 0,005% max
 Zn remaining

Capacity: 780 Ah/kg

Efficiency: 95%

Potential: - 1110 mV Cu -

CuSO₄ electrolyte artificial sea water DIN 50905

Insert quality: Plate, bar section EN10025 Grade S235/S275

Insert welding: All fabrication of steel inserts are according EN10287 and EN10288

NET WEIGHT: 24,0 kg
 GROSS WEIGHT: 26,0 kg
 INSERT WEIGHT: 2,0 kg

Company address:
 Tinstraat 109
 2984AN Ridderkerk
 The Netherlands
 Tel. +31 (0) 180 420 055
 Fax. +31 (0) 180 499 810
 E-mail. info@nedmarine.com
 www.nedmarine.com



Drawing name:

NED 240Z

Drawing No.:
 17.0049

Rev:
 0

Sheet:
 1/1

Drawn:
 A.M.

Approved:
 G.M.

Scale:
 -

Date:
 10/05/2017

Ned T.D. 16 003