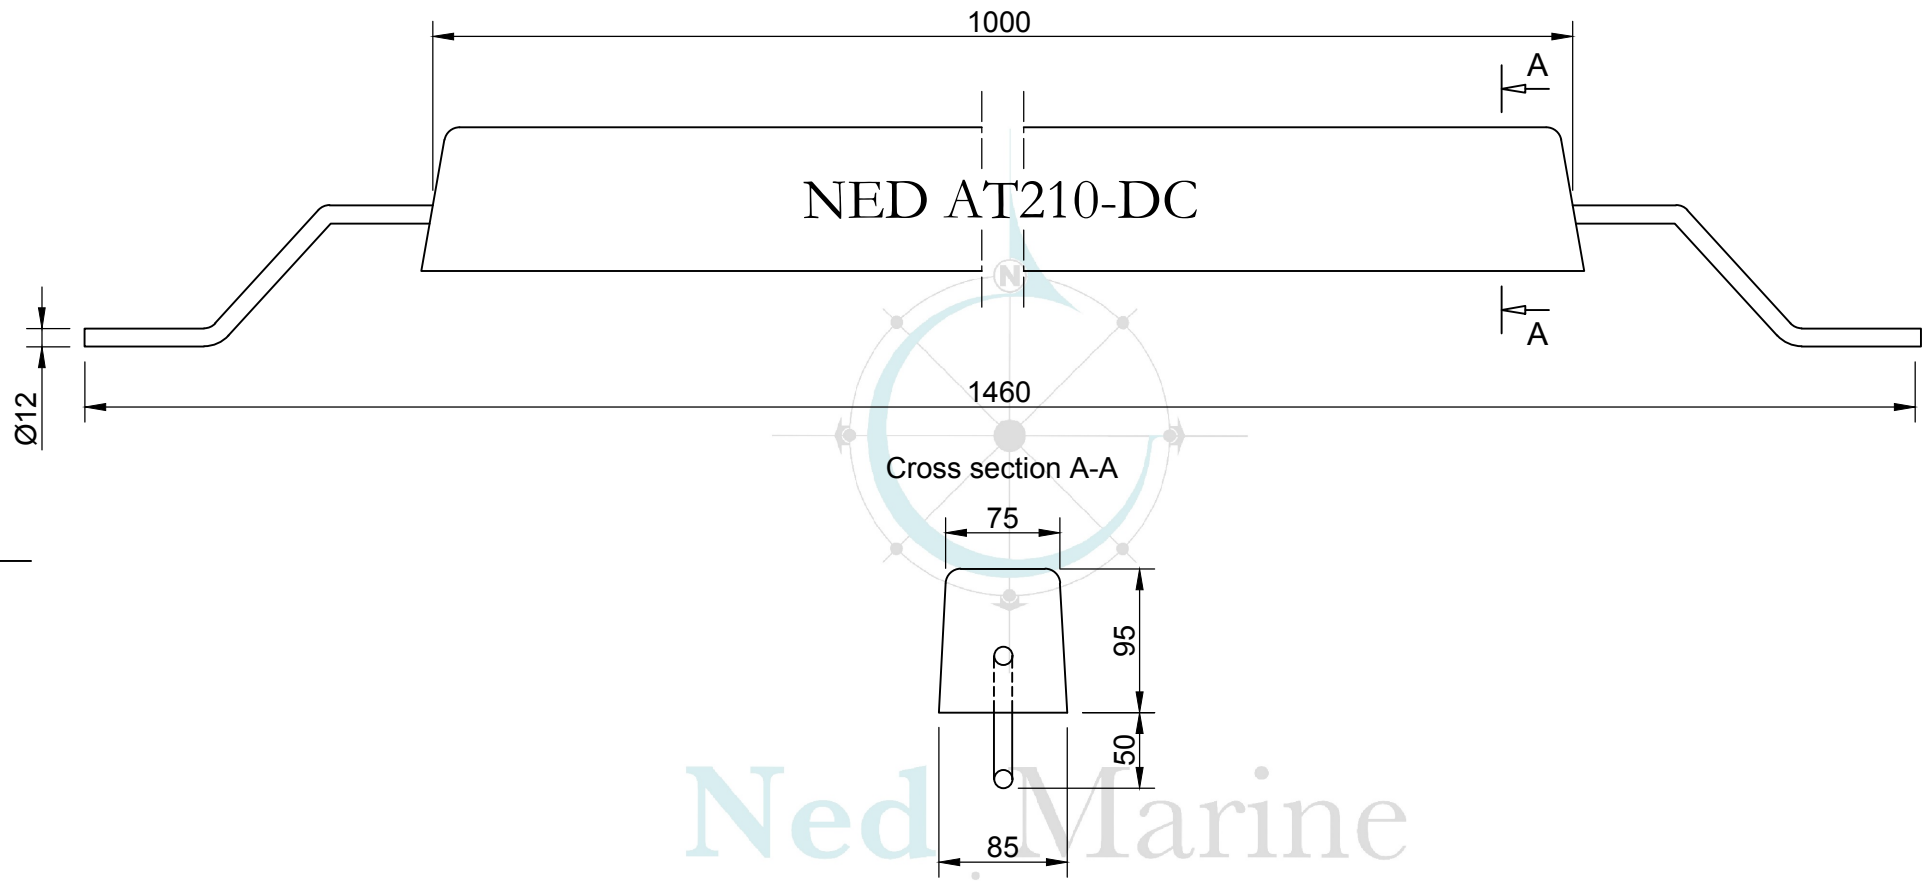

ALUMINIUM PL742 ALLOY SPECIFICATION

Components:
Zn 3,5-5% range
Fe 0,16% max
Cu 0,01% max
In 0,02-0,05% max
Si 0,1% max
Others 0,04% max
Al remaining

Capacity: 2680 Ah/kg
Efficiency: 90%
Potential: - 1110 mV Cu -
$CuSO_4$ electrolyte artificial sea water DIN 50905
Insert quality: Plate, bar section EN10025 Grade S235/S275
Insert welding: All fabrication of steel inserts are according EN10287 and EN10288

NET WEIGHT: 19,3 kg
GROSS WEIGHT: 20,6 kg

Company address:
Tinstraat 109
2984AN Ridderkerk
The Netherlands
Tel. +31 (0) 180 420 055
Fax. +31 (0) 180 499 810
E-mail. info@nedmarine.com
www.nedmarine.com

Ned Marine services B.V.

Drawing name: NED AT210-DC			
Drawing No.: 17.0111		Rev: 0	Sheet: 1/1
Drawn: R.D.	Approved: G.M.	Scale: -	Date: 18/07/2017

Ned T.D. 16 003

A4