


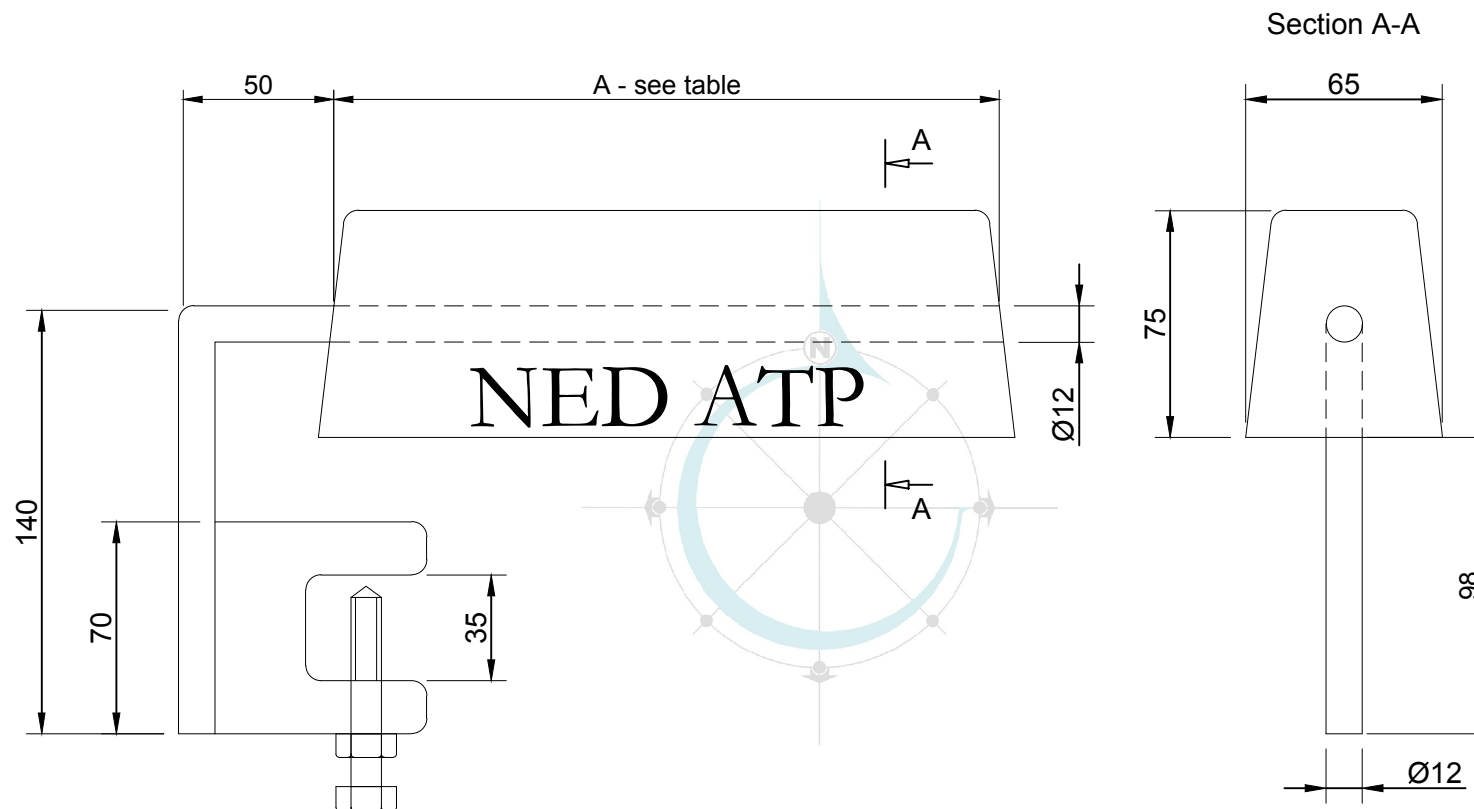

Anode	A	Net weight	Gross weight
NED ATP50	380	4,3 kg	4,8 kg
NED ATP80	610	7,1 kg	7,8 kg
NED ATP110	765	8,9 kg	9,8 kg

ALUMINIUM PL742 ALLOY SPECIFICATION

Components:
 Zn 3,5-5% range
 Fe 0,16% max
 Cu 0,01% max
 In 0,02-0,05% max
 Si 0,1% max
 Others 0,04% max
 Al remaining

Capacity: 2680 Ah/kg
 Efficiency: 90%
 Potential: - 1110 mV Cu -
 CuSO₄ electrolyte artificial sea water DIN 50905
 Insert quality: Plate, bar section EN10025 Grade S235/S275
 Insert welding: All fabrication of steel inserts are according EN10287 and EN10288

Company address:
 Tinstraat 109
 2984AN Ridderkerk
 The Netherlands
 Tel. +31 (0) 180 420 055
 Fax. +31 (0) 180 499 810
 E-mail. info@nedmarine.com
 www.nedmarine.com



Drawing name:

NED ATP50, 80, 110

Drawing No.:
17.0118

Rev: 0

Sheet:
1/1

Drawn:
R.D.

Approved:
G.M.

Scale:
-

Date:
28/07/2017